


A系列短节距精密滚子链

Short pitch precision roller chains (A series)

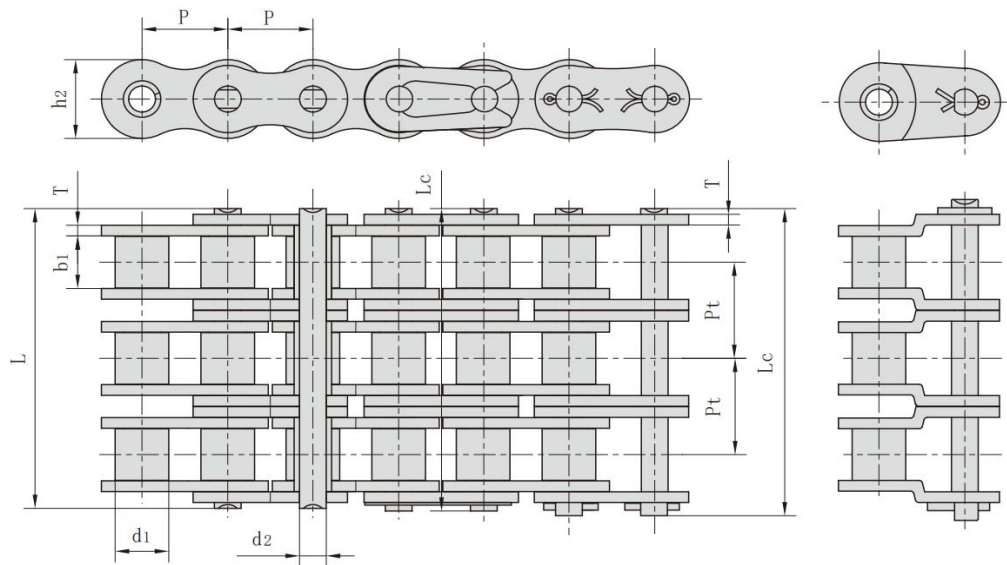

三排滚子链/套筒链 Triplex roller chains & bush chains

ANSI 链号	ISO/DIN 链号	节距	滚子直径	内节内宽	销轴直径	链板厚度	内链板高度	排距	销轴长度		抗拉强度	每米长重
ANSI Chain	ISO/DIN Chain	Pitch	Roller diameter	Width between inner plates	Pin diameter	Plate thickness	Inner plate depth	Transverse pitch	Pin length		Ultimate tensile strength	Weight per meter
		P mm	d1 mm	b1 mm	d2 mm	T mm	h2 mm	Pt mm	L mm	Lr mm	U.T. S. (kN)	Wt. (kg/m)
*25-3	*04C-3	6.35	3.30	3.10	2.31	0.80	6.00	6.40	21.00	21.50	10.50	0.44
*35-3	*06C-3	9.525	5.08	4.68	3.58	1.30	9.00	10.13	32.70	33.50	23.70	1.05
40-3	08A-3	12.70	7.92	7.85	3.96	1.50	12.00	14.38	45.40	46.60	42.30	1.90
50-3	10A-3	15.875	10.16	9.40	5.08	2.03	15.09	18.11	57.00	58.50	66.60	3.09
60-3	12A-3	19.05	11.91	12.57	5.94	2.42	18.00	22.78	71.50	73.30	95.40	4.54
80-3	16A-3	25.40	15.88	15.75	7.92	3.25	24.00	29.29	91.70	93.60	170.10	7.89
100-3	20A-3	31.75	19.05	18.90	9.53	4.00	30.00	35.76	112.20	116.30	265.50	11.77
120-3	24A-3	38.10	22.23	25.22	11.10	4.80	35.70	45.44	141.40	145.20	381.00	17.53
140-3	28A-3	44.45	25.40	25.22	12.70	5.60	41.00	48.87	152.20	156.80	517.20	22.20
160-3	32A-3	50.80	28.58	31.55	14.27	6.40	47.80	58.55	181.80	186.60	680.40	30.02
180-3	36A-3	57.15	35.71	35.48	17.46	7.20	53.60	65.84	204.40	210.20	840.70	38.22
200-3	40A-3	63.50	39.68	37.85	19.85	8.00	60.00	71.55	223.50	230.40	1061.40	49.03
240-3	48A-3	76.20	47.63	47.35	23.81	9.50	72.39	87.83	271.30	278.6	1530.90	71.60

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush